


# LAMPIRAN

## Lampiran 1. Lembar Data kabel feeder

KSR Low Loss Cable

**KSR300** [More Products](#)

[Home](#) > [PRODUCTS](#) > [RF transmission](#) > [RF Cable](#)

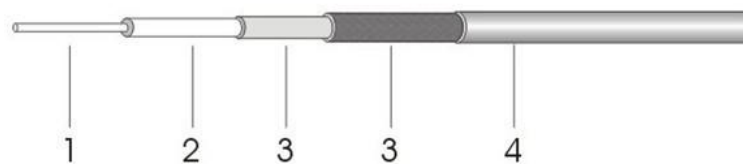

### Construction Specification

Item	Material	Diameter(mm)
1. Inner Conductor	Solid Copper or Copper Clad Aluminum	1.78
2. Dielectric	Physical Foam Polyethylene	4.83
3. Outer Conductor	Bonded Aluminum Foil + Tinned Copper Braid	Nom.5.72
4. Jacket	Polyethylene	7.62

### Electrical Characteristics

Capacitance(pF/m)	79.1
Impedance(ohm)	50
Velocity of Propagation(%)	85
Inner Conductor DC Resistance(ohm/m)	7.28/11.56
Outer Conductor DC Resistance(ohm/m)	7.62
Jacket Voltage Withstanding(Vrms)	5000

Peak Power(KW)	10
Shielding Effectiveness(>dB)	90

### Mechanical and Environmental Characteristics

Operating Temp(°C)	-40 to +80
Bending Radius(mm)	38
ROHS	Compliant

### Attenuation and Avg. Power(20°C)

Frequency(MHz)	Attenuation(dB/100m)	Avg. Power(KW)
30	3.5	1.78
50	4.5	1.38
150	7.9	0.79
220	9.6	0.65
450	13.8	0.45
900	19.9	0.31
1500	26.0	0.24
1800	28.7	0.22
2000	30.3	0.21
2500	34.2	0.18
5800	54.3	0.11

## Lampiran 2. Pengukuran antenna 1 (CLC)

---



### ORGANISASI AMATIR RADIO INDONESIA DAERAH ISTIMEWA YOGYAKARTA

Alamat : Jl. Glagahsari 19A Yogyakarta, 55164. Telp: (0274) 379121, Email : orda.diy.2016@gmail.com  
Freq : 145.700 MHz, 146.900 MHz (Dup-600, Tn: 88.5), 434.250 MHz (Dup-4000, Tn: 88.5)



## The 46<sup>th</sup> SEANET CONVENTION OMNI DIRECTIONAL ANTENNA CONTEST

### YB2ZYY

## CERTIFICATE ANTENNA

Rec Num	= 13
Participant Number	= 012
Participant CallSign	= YD2DVT
Antenna Name	= TELEK1
Antenna VSWR	= 1
Antenna RL (dB)	= Ok
Result Ant ERP (dBm)	= -64.33
Result Ant Gain (dBcolinear)	= 10.65
Sta A.(PD= 037 km,Alt=90m) Signal (dBm)	= -68.93
Sta B.(PD= 23.953 km,Alt=592m) Signal (dBm)	= -67.02
Sta C.(PD= 9.507 km,Alt=36m) Signal (dBm)	= -92.45
Sta D.(PD= 11.055 km,Alt=100m) Signal (dBm)	= -73.75
Forward Pwr Fwd (W)	= 17.5
Reflected Pwr Refl(W)	= 0
Date Time	= 10-21-2018/11.33.11
BaseLocation: Lat= 0750.66993,S Long= 11021.76536,E Alt= 90 meter	

Yogyakarta, 21 Oktober 2018

Ketua Orda DIY

Panita Pelaksana

Anton Sutrisno - YB2UFO

Joko Anggoro - YC2YKO

---

### Lampiran 3. Pengukuran antenna 2 (SLC)



## ORGANISASI AMATIR RADIO INDONESIA DAERAH ISTIMEWA YOGYAKARTA

Alamat : Jl. Glagahsari 19A Yogyakarta, 55164. Telp: (0274) 379121, Email : [orda diy 2015@gmail.com](mailto:orda diy 2015@gmail.com)  
Freq : 145.700 MHz, 146.900 MHz (Dup-600, Tn: 88.5), 434.250 MHz (Dup-4000, Tn: 88.5)



## The 46<sup>th</sup> SEANET CONVENTION OMNI DIRECTIONAL ANTENNA CONTEST

### YB2ZYY

## CERTIFICATE ANTENNA

Rec Num	= 14
Participant Number	= 013
Participant CallSign	= YD2DVT
Antenna Name	= TELEK2
Antenna VSWR	= ...
Antenna RL (dB)	= ....
Result Ant ERP (dBm)	= -45.35
Result Ant Gain (dBcolinear)	= 29.63
Sta. A. (PD= .037 km, Alt=90m) Signal (dBm)	= -68.13
Sta. B. (PD= 23.953 km, Alt=592m) Signal (dBm)	= -45.38
Sta. C. (PD= 9.507 km, Alt=36m) Signal (dBm)	= -91.93
Sta. D. (PD= 11.055 km, Alt=100m) Signal (dBm)	= -74.73
Forward Pwr. Fwd (W)	= 0
Reflected Pwr. Refl (W)	= 0
Date Time	= 10-21-2018/11:45:57
BaseLocation: Lat= , Long= , Alt= Ant. Gain (dBcolinear)0750.66993Signal (dBm)SSignal (dBm)11C	

Yogyakarta, 21 Oktober 2018

Ketua Orda DIY

Panita Pelaksana

Anton Sutrisno - YB2UFO

Joko Anggoro - YC2YKO

## Lampiran 4. Bukti Submit Jurnal

7/31/2021

Institut Teknologi Nasional Yogyakarta Mail - [IJECS 2021 Batch #2] #1570749157 has been uploaded



suyanta sttnas &lt;suyanta@sttnas.ac.id&gt;

### [IJECS 2021 Batch #2] #1570749157 has been uploaded

1 message

**T. Sutikno Ijeecs Editor (ijeecs@iaescore.com)** <ijeecs=iaescore.com@edas.info> Thu, Jul 29, 2021 at 9:11 AM  
 Reply-To: "T. Sutikno Ijeecs Editor" <ijeecs@iaescore.com>  
 To: Suyanta Suyanta <suyanta@sttnas.ac.id>  
 Cc: "T. Sutikno Ijeecs Editor" <ijeecs@iaescore.com>

Dear Mr. Suyanta Suyanta:

Thank you for uploading your paper 1570749157 (*Optimization of Ground Plane Antenna Gain by increasing the Inductance of Loading Coil based on Silver Material*) to **Indonesian Journal of Electrical Engineering and Computer Science (a Scopus indexed journal)**. The paper is of type application/pdf and has a length of 461396 bytes.

You can modify your paper at <https://edas.info/showPaper.php?m=1570749157> and see all your submissions at <https://edas.info/index.php?c=28523> using the EDAS identifier [suyanta@sttnas.ac.id](mailto:suyanta@sttnas.ac.id)

Regards,  
 Assoc. Prof. Dr. Tole Sutikno  
 Editor-in-Chief,  
 Indonesian Journal of Electrical Engineering and Computer Science  
<http://ijeecs.iaescore.com>  
 email: [ijeecs@iaescore.com](mailto:ijeecs@iaescore.com), [ijeecs.iaes@gmail.com](mailto:ijeecs.iaes@gmail.com)

Online paper submission: <https://edas.info/N28523>

ACC

Telah disubmit ke IJECE Scopus Q2

PIS Sek Prodi MTE UNISSULA



*[Signature]*  
**Arief Marwanto, Ph. D**  
 210600018

## *Optimization of Ground Plane Antenna Gain by increasing the Inductance of Loading Coil based on Silver Material*

Suyanta, Arief Marwanto, Suryani Alifah

**Abstract**— To overcome the attenuation due to signal distortion in the telex model antenna transmitter, the copper and silver coil loading materials for gain have been tested on the ground plane antenna with telex model. To get an in-depth analysis of the loading coil material, there are three variables that are measured as the performance outcome, namely, gain, bandwidth and quality factor. Real-scale experiments in the field have used two materials as loading coil materials, namely pure copper and silver. In this experiment, a coaxial feeder cable with a characteristic impedance of  $50 \Omega$  and an operating frequency of 144.280 MHz was used. To achieve a maximum value at the resonant frequency, the feeder cable is tuned to approximate pure resistive with minimum impedance.

Furthermore, the antenna is set at a SWR value  $\approx 1$  and measurements of the antenna impedance (ZL), return loss (RL), reflection coefficient ( $\rho$ ) are measured to calculate the bandwidth (BW) and quality factor (Q) for each antenna. For the measurement of field strength (ERP), the antenna functions as a transmitter in an open area with 4 measurement points around the antenna with different distances, then calculate the antenna gain.

The calculation results show that the bandwidth of the frequency is BW = 5.166 MHz and the quality factor Q = 27.929 for the antenna with copper coil loading, while for the antenna with the silver coil loading the bandwidth is obtained BW = 4.500 MHz and the quality factor Q = 32.062. Thus the silver loading coil (SLC) material can provide a good reduction in attenuation of signal distortion when signal radiation occurs from the antenna to the air.

**Keywords:** *loading coils* Materials, antenna telex, Quality Factor, Gain, Frequency Bandwidth

<sup>1</sup> Program Studi Teknik Elektro, Departemen Teknik, Institut Teknologi Nasional Yogyakarta; Jln. Babarsari, Catur Tunggal, Depok, Sleman, Yogyakarta 55281 INDONESIA; e-mail:

<sup>2, 3</sup> Magister Teknik Elektro, Universitas Islam Sultan Agung Semarang, Jln. Jln. Kaligawe Km 4 Semarang 50112 INDONESIA e-mail: [arief@unissula.ac.id](mailto:arief@unissula.ac.id) and

### I. INTRODUCTION

#### A. Introduction

Antenna is a transitional device between the transmission line and free space and vice versa. Antennas are made of metal in the form of rods or wires and function to transmit or receive radio waves [1]–[6]. Antennas have various types of circuits and models, when an antenna is used it has two uses, namely emitting electromagnetic wave signals and receiving electromagnetic wave signals. The guide wave travels along the transmission line, then is radiated into a free

space waves [7]. To overcome attenuation due to long distances and large signal distortion, loading coils have been used for decades [8], [9] [10], [11].

Loading coils or load coils are inductors that are inserted into an electronic circuit to increase their inductance which is used to prevent signal distortion in long-distance telegraph transmission cables. It is also used in radio antennas, or between an antenna and its feeder, to shorten the resonance of an antenna electrically at its operating frequency [12].

In a radio telecommunication system, this part is very important and requires more handling because many factors can affect the level of reception and transmission, including the SWR (Voltage Standing Wave Ratio) value, the type / model of the antenna, the physical dimensions of the antenna, the effectiveness or antenna gain, directives etc., [13]. The transmission is said to be good if the radio output power is as minimal as possible to reach the transmission distance as far as possible so that it will save electricity consumption besides that the radio device will also last longer [14], [15].

Ground plane antenna, telex model includes this type of antenna which is widely used in radio telecommunications in the amateur radio community, the Police, the Indonesian Red Cross, disaster management agencies, volunteers, etc. The working frequency is usually in the HF (High Frequency), VHF (Very High Frequency) and UHF (Ultra High Frequency) bands. This antenna construction consists of 2 rods of  $5/8 \lambda$  size between the loading coil and 2 groups of multilevel radial arrangement (pseudo ground) each consisting of 4 rods measuring  $1/4 \lambda$ . The rod material usually uses aluminum and for loading coil using copper wire. Loading coil with a DC ground system is attached to a connector as the power input point of the transmitter amplifier via the coaxial feeder cable [16]–[18].

#### B. Telex Antenna Ground Plane Model

The development of telex antennas has been carried out by several researchers, among them are [8], [9], [19]. Several studies related to antenna materials have been carried out by [20]–[23], by making a 3-element

yagi antenna using various materials such as iron, brass, copper and aluminum in order to get the most basic materials for radio wave transmission. However, aluminum and copper produce a smaller SWR value than other materials and for the manufacturing process aluminum is easier to shape and lighter in weight.

Several studies on ground plane antennas have also been carried out, including [8], [24]–[27], in their research a  $2 \times 5/8 (\lambda)$  ground plane antenna using copper coil loading materials and radial ground has been designed and built, amounting to 8 pieces. This antenna is very suitable for areas and hilly conditions or areas with many buildings and is stronger than antennas with  $1 \times 1/4 \lambda$  ground plane, or  $1 \times 1 / 8\lambda$  vertical antennas. Researcher [28] has conducted research by making a ground plane antenna  $3 \times 5/8 \lambda$  which is based on a telex antenna and produces a greater beam strength but its physical size is much longer than a regular telex antenna.

Research conducted by [29] states that the effect of loading coil in the antenna can reduce the damping value up to 0.052 nepper, so that it has a small distortion value by increasing the inductance value of the loading coil. However, the value of the input voltage when passing through the copper cable is not dampened but it is increasingly strengthened by the copper cable, thus increasing the inductance value on the loading coil and the gain is also greater. The greater the number of loading coils in the antenna, the greater the effect on the attenuation of copper cables. The problem is that this copper cable (cooper loading coils / CLC) has a very high level of attenuation, so that it affects the gain obtained, although it can be reduced by increasing the number of loading coils, but this method is very ineffective and affects the inductance and impedance of the antenna.

To overcome this, a study of the loading coil material needs to be carried out to reduce the damping level and reduce the distortion value in the transmitter. In this paper, the type of silver material (silver loading coils / SLC) is used to determine differences in attenuation and distortion characteristics, especially referring to the parameters of the frequency band width, quality factor, transmission distance from the antenna with reference to the number of turns, wire size, spacing between windings and all antenna rod sizes are the same including the value of the SWR.

## II. ARCHITECTURE OF ANTENNA GAIN IMPROVEMENT MODEL.

To find the optimal effect of these materials, Fig. 1 illustrates a model architecture for increased ground plane antenna gain. Based on the SWR measurement, the impedance value ( $Z_L$ ), the reflection coefficient ( $\Gamma$ ), and Return Loss (RL) can be calculated. The measurement of the frequency characteristics is

obtained by observing the SWR value graph which is 1.5 at two frequencies, namely the lower limit frequency ( $f_L$ ) and the upper limit frequency ( $f_H$ ).

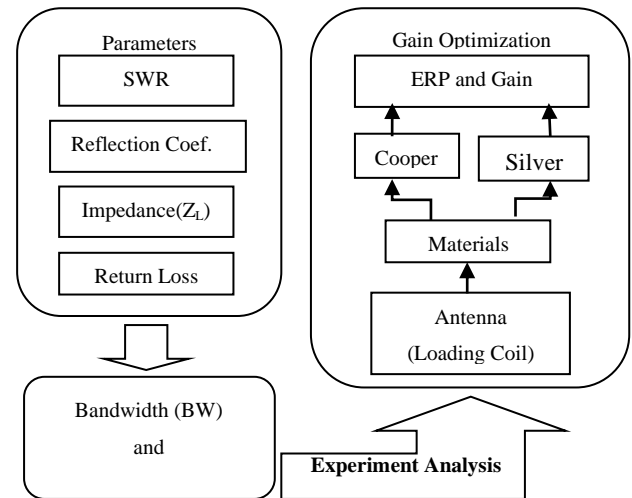



Fig.1 Experimental Analysis of Architecture of Antenna Gain Enhancement model using loading coils based on cooper and silver materials.

The difference between  $f_H$  and  $f_L$  is the bandwidth (BW) of the antenna, and by directly comparing the BW with the operating frequency ( $f_O$ ), the value of the quality factor (Q) is obtained. Measurement of the received field strength was carried out by 4 stations with different distances and positions in the four corners around the antenna which functioned as a transmitter. Antenna gain is obtained by calculating based on ERP (*Effective Radiated Power*) measurements at each station and adding them up. The measurement performance of the parameters is carried out by experimenting in the field and calculated using a vector network analyzer that can measure the output parameters directly both in display and in file form.

### A. Loading coils

An antenna loading coil is an antenna loading coil that is an inductor that is placed in series on the antenna element to reduce the resonance frequency of the antenna and for impedance adjustment [30]. The coil design used is as shown in Fig. 2.



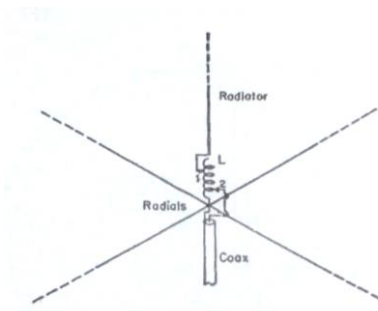

Gbr.2 Loading coil [30]

### B. Antenna Parameters

Several antenna parameters need to be considered in determining the type of antenna, including impedance, SWR, return loss, bandwidth, quality factor, and gain. Each antenna generally has the same characteristics as a transmitter and receiver.

1). *Antenna Impedance*: At a terminal, the antenna impedance can be defined as the ratio between the voltage to the current at that terminal, [8], [9], [12], [19] [31];

$$Z_T = \frac{V}{I} \quad (1)$$

Impedance is important in the design of the antenna because the antenna itself actually serves as adjusting the antenna impedance with the impedance of the channel. This adjustment needs to be done so that maximum power transfer from the source occurs by the size, physical construction and materials and working frequency of the antenna.

2). *SWR (Voltage Standing Wave Ratio)*: On a transmission line there are two components of the voltage wave, namely the transmitted voltage ( $V_o^+$ ) and the reflected voltage ( $V_o^-$ ). The ratio between the reflected and transmitted voltage is known as the voltage reflection coefficient ( $\Gamma$ ), which is shown in equation (2).  $Z_1$  is the load impedance and  $Z_0$  is the lossless line impedance. The stress reflection coefficient ( $\Gamma$ ) has a complex value, which represents the magnitude and the reflection phase, [9] [31]

$$\Gamma = \frac{V_o^-}{V_o^+} = \frac{Z_1 - Z_0}{Z_1 + Z_0} \quad (2)$$

To find SWR equation (3) is used as follows [9].

$$SWR = \frac{V|_{\max}}{V|_{\min}} = \frac{1 + |\Gamma|}{1 - |\Gamma|} \quad (3)$$

The best conditions are when the SWR is 1, which means there is no reflection when the line is in a state of perfect matching. However, this condition is in practice difficult to obtain. Therefore, the standard safe SWR value for antenna fabrication is  $SWR < 1.5$ .

3). *Return loss*: return losses or reflection loss is the loss of signal strength due to the reflection behind the resulting discontinuity in a transmission line telecommunication both conventional and fiber optic. This discontinuity can occur due to incompatibility with the load conditions or with the user's equipment. This state is usually expressed as a ratio in decibels (dB), where the return losses are given by the following equation [8] [31].

$$RL(dB) = 10 \log \frac{P_i}{P_r} \quad \text{atau} \quad RL(dB) = 10 \log -20 \log |\Gamma| \quad (4)$$

where RL (dB) is behind the loss in dB,  $P_i$  is the signal strength that occurs and  $P_r$  is high direfleksikan. Semakin signal strength lost behind a piece of equipment, the better the equipment.

4). *Bandwidth (BW)*: The bandwidth of an antenna is the working frequency area of the antenna which is limited by a certain SWR. Usually the bandwidth is limited to  $SWR \leq 2.0$ . In a broadband antenna, bandwidth is the difference between the upper frequency ( $f_H$ ) with a lower frequency ( $f_L$ ) [32].

$$BW = f_H - f_L \quad (5)$$

5). *Quality Factor (Q)*: is a measure of the selectivity of the resonator circuit where the resonator circuit is a Band Pass Filter (BPF) filter circuit with a narrow bandwidth. The larger the Q value, the bandwidth will be more and more narrow [32].

$$Q \equiv 2 \pi \frac{\text{The maximum energy stored}}{\text{energy dissipated each vibration / cycle}} \quad (6)$$

Impedance can reach the maximum or minimum value for their resonance, a condition in which the circuit is excited at its natural frequency and the frequency that causes the condition occurs is called the resonant frequency ( $f_o$ ). The quality factor can also be expressed as the ratio between the resonance frequency of the bandwidth [32].

$$Q = \frac{f_o}{BW} \quad (7)$$

6). *Field strength*: *Field strength* or also known as field intensity, generally have a strong sense as a field of a magnetic or an electric wave electromagnetic from a given point. In particular field strength can be defined as the field strength received by the receiving antenna of electricity electromagnetic energy emitted by radio transmitters on a particular frequency. In this case the field strength of the electromagnetic wave has a magnitude of  $\text{dB}\mu\text{V}/\text{m}$ . Electromagnetic wave energy is divided in the form of a magnetic field and electric field, so that the electromagnetic wave energy (U) is equal to the sum of the electric field energy (EU) and the magnetic field (UM). This electromagnetic wave energy (U) will be emitted and received by the antenna. At the point of measuring the field strength, the field strength meter will detect some of the strength of the electromagnetic wave energy (U) in  $\text{dB}\mu\text{V}/\text{m}$  [31].

7). *Gain dan Efective Radiated Power (ERP) antenna*: Antennas that have the nature of guidance (including dipole) is said to have reinforcement. And measuring the gains made by comparing it to the isotropic antenna. Isotropic antenna is assumed to have no reinforcement because the radiation in all directions. Dipole antenna has a  $\pm 2.1$  dBi effectiveness against isotropic antenna. Effectiveness is always interpreted as a comparison against a reference. Effectiveness antenna G is expressed by dB, since dB is very practical in measuring the ratio of power [31]. ERP calculations start with the transmitter power output (TPO: Transmitter Power Output). (It is assumed as the output of the power amplification stage end if an external power amplifier is used.) Then the system gain of the overall antenna system includes an antenna, transmission line, and all the components of the transmission line is applied to the TPO to calculate the output power of the entire station, as shown equation (8) [30].

$$\begin{aligned} \text{System Gain} &= \text{Transmission Line Loss} - \\ &\quad \text{Transmission Loss Component} + \\ &\quad \text{Antenna Gain} \\ \text{ERP} &= \text{TPO} \times \text{System Gain} \\ \text{ERP (dBm)} &= \text{TPO (dBm)} + \text{System Gain (dB)} \end{aligned} \quad (8)$$

In this experiment, a vector network analyzer antenna used to measure all these parameters.

### III. MODEL TESTING SYSTEM

#### A. Measurements Resonance feeder cable

To tune the feeder cable that resonates at a frequency of 144.28 MHz, a dummy load is required. In

order for the power emitted from the transmitter to produce optimal power, the output impedance of the final stage power amplifier must be the same as the transmission line impedance and the antenna impedance. In this experiment a cable cutting is done little by little to get value of  $\text{SWR} \approx 1$ . Model testing can be seen in Fig. 3.

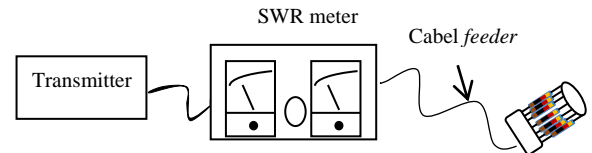


Fig. 3 Resonance feeder cable Model

#### B. Characteristics Frequency Antenna Measurement

The frequency characteristics or may be called the width of the frequency band antenna tested with SWR meter or using antenna analyzer. How the tests performed is an antenna used for transmitting from the lowest frequency to the highest frequency with a maximum of 1.5 VWSR meter (generally 2.0). How to measure the antenna frequency characteristics can be seen in Fig. 4.

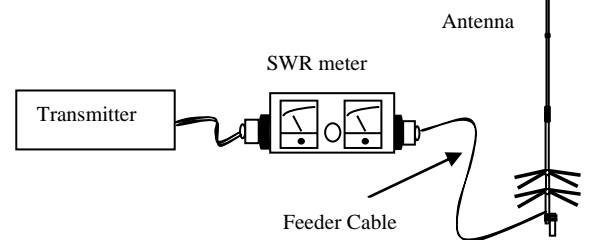


Fig. 4 Characteristics Frequency Antenna Measurement Model

#### C. ERP and antenna gain measurement

A transmitter will emit an electric field through the antenna, and the measuring instrument is installed in a location around the antenna at different distances. Measurements using a field strength meter or signal meter that is already available on the radio transceiver. Through the ERP value calculation will be obtained at each station location. While the gain is calculated based on the value of the ERP. The test model is seen in Fig. 5.

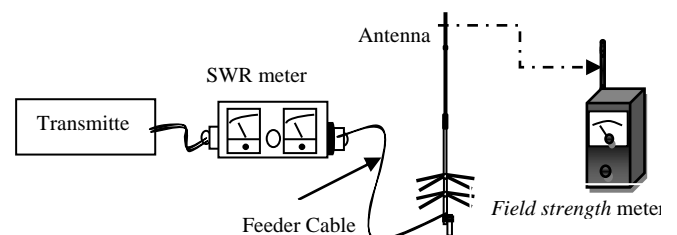


Fig. 5 Model antenna field strength testing

#### IV. RESULTS AND ANALYSIS

Antenna system test results obtained by performing the above procedure is initiated by adjusting the impedance between the coaxial cable as a feeder with a dummy load, then adjust the antenna impedance with the feeder cable to get  $SWR \approx 1$ . In the test experiment in this study, the antenna 1 is expressed with cooper material loading coils (CLC) and the antenna 2 represented by the silver loading coils (SLC). The following are the results of the measurements taken.

##### 4.1 Resonance tuning of the feeder cable

This step is taken to get the cable length according to the desired working frequency, in this study it is 144,280 MHz. In practice, this step is needed so that the cable requirements are in accordance with the planned support pile height in addition to the return losses in the channel as large as possible. By using antenna analyzer measurement results obtained in accordance Fig 6 below.

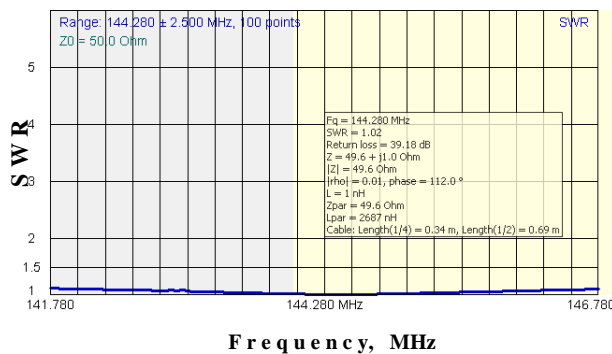


Figure 6 The measurement results feeder cable

The cable used is KSR 300 King Signal having a characteristic impedance of 50Ω and a velocity factor of 0.66 (66%). Results obtained cable tuning cable length 10,24m, at a frequency of 144.280 MHz SWR obtained value = 1.02, -39.18 dB return loss, impedance-j0,1 Z = 49.6 Ω and cable length of  $1 / 2\lambda$  is 0, 69m.

The desired frequency is 144.280 MHz, in calculation of lengths obtained are as follows:

$$\lambda_0 = 3 \times 10^8 \text{ Hz} / 144,28 \times 10^6 = 2,07929026 \text{ meter (on air)}$$

whereas if it propagates in the media, the propagation speed changes more slowly so that the velocity factor ( $v_f$ )

data is needed to calculate the wavelength of the feeder cable used, so that the wavelength changes as follows:

$$\lambda = v_f \times \lambda_0 = 0,66 \times 2,07929026 = 1,37233158 \text{ meter}$$

$$1/2 \lambda = 1,37233158/2 = 0,6861657887 \text{ meter}$$

The required cable length is a multiple of  $1/2 \lambda$  because the SWR value will repeat every  $1/2 \lambda$  [11]. This study used a multiplier 15 to obtain  $15 \times 0,6861657887 \text{ meter} = 10.2924868305 \text{ meter}$ .

##### 4.2 Measurement of Antenna Frequency Characteristics

The results of tuning and measuring the frequency response to the SWR value and the return loss of the antenna in the frequency range 119,280 - 169,280 MHz can be seen in Figure 7 to Figure 12. At the desired frequency, 144,280 MHz, the SWR value of each antenna is obtained with a copper loading coil ( antenna 1 / CLC) is 1: 1,11 and the silver material (antenna 2 / SLC) is 1: 1,12.

Especially for antenna 1, the antenna parameter data is obtained according to Figure 7 as follows. At the desired frequency, which is 144.280 MHz, the impedance value is  $Z = 45.1 + j0.4 \Omega$ ,  $|Z| = 45.1 \Omega$ , reflection coefficient  $|\Gamma| = 0.05$ , return loss RL = 25.66 dB. From this data it can be calculated and matched with the measurement results including the SWR value, reflection coefficient value  $|\Gamma|$ , return loss (RL), frequency bandwidth (BW) and quality factor (Q) of the antenna.

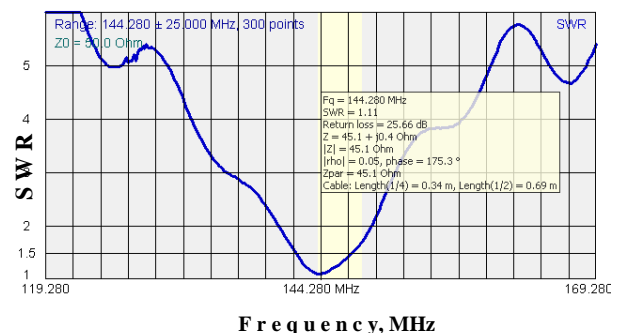


Fig.7 Frequency characteristics of copper loading coils (CLC) on Antenna 1

Based on the impedance of the antenna 1 is calculated how much the reflection coefficient and its SWR value based on the equation (2), (3) and (4) that:

$$Z = 45,1 + j0,4 \Omega$$

$$|\Gamma| = \sqrt{45,1^2 + 0,4^2} = \sqrt{2034,01 + 0,16} = \sqrt{2034,17}$$

$$= 45,1018 \Omega$$

$$|\Gamma| = \frac{Z_1 - Z_0}{Z_1 + Z_0} = \frac{50 - 45,1018}{50 + 45,1018} = \frac{4,8982}{95,1018} = 0,05150481$$

$$SWR = \frac{1 + |\Gamma|}{1 - |\Gamma|} = \frac{1 + 0,05150481}{1 - 0,05150481} = \frac{1,05150481}{0,94849519} = 1,1086032$$

$$RL = -20 \log |\Gamma| = -20 \log 0,05150481 = -20 \times -1,2881522 = 25,763044 \text{ dB}$$

Table I  
VALUE PARAMETER MEASUREMENT COMPARISON  
BETWEEN CLC AND SLC

Parameters	CLC (Antenna 1)	SLC (Antenna 2)
Z	45,1+j0.4 Ω	44,6+j0.5 Ω
Z	45,1018 Ω	44,6028 Ω
\Gamma	0,05150481	0,05705117
SWR	1,1086032	1,12100587
RL	25,763044 dB	24,8747 dB

To get optimal results, then adjusting the size of the rod antenna SWR be set to produce the smallest possible value. Antenna measurement obtained from a minimum value for the antenna SWR CLC was 1.11 and for antenna SLC is 1.12. Due to the size of the rod antenna setting can not be in tuning for approaching SWR = 1 on the same working frequency of 144.28 MHz. Thus, the consequences for the value - the value of Z, |Z|, |\Gamma| and RL is better than SLC antenna. It also means that power is going (forward) to the CLC will be greater than those to the SLC and the reflected power (reverse) SLC larger. However, from the measurement when used for radiating or operated actually obtained value larger ERP despite SLC SLC power is going to be smaller than the antenna 1. This indicates that the SLC is better (higher efficiency) than CLC using copper.

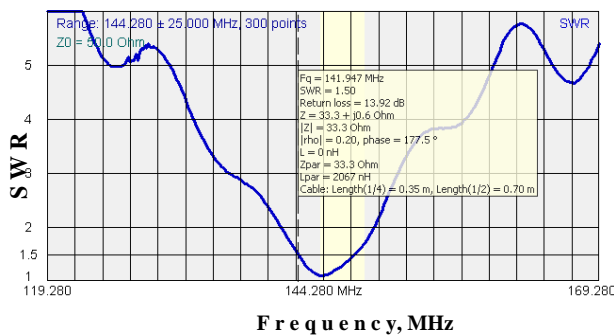


Fig. 8 The lower limit frequency of the antenna 1

Figure 8 shows the lower frequency limit of the antenna 1 where the value of SWR = 1: 1.50 falls on frequency 141.947 MHz, whereas Fig 9 shows the frequency 147.113 MHz at SWR value = 1: 1.48 (because the cursor can not be precise in SWR = 1: 1.50). From both these frequencies can be calculated bandwidth (BW)

as the frequency response characteristics of the antenna 1 and also the value of the quality factor. Based on the equation (5) is obtained

$$BW = 147,113 - 141,947 = 5,166 \text{ MHz}$$

By using equation (7) the value of the quality factor Q is calculated as follows:

$$Q = \frac{f_0}{BW} = \frac{144,280 \text{ MHz}}{5,166 \text{ MHz}} = 27,929$$

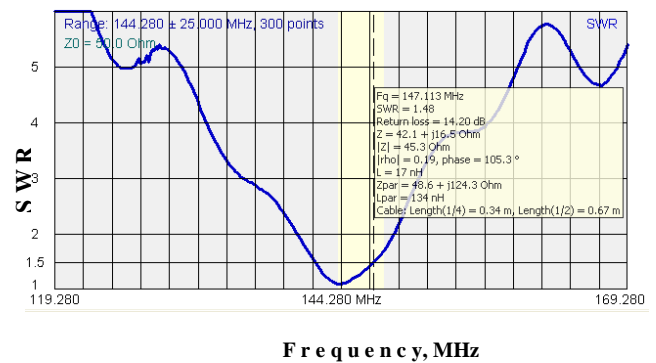


Fig. 9 The Upper limit frequency of the antenna 1

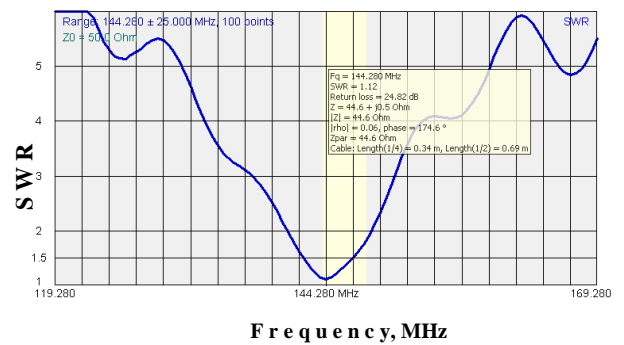


Fig.10 Frequency characteristics of silver loading coils (SLC) on Antenna 2

Figure 10 is the result of the measurement antenna 2 (SLC), antenna parameter data obtained as follows; At a desired frequency is 144.280 MHz impedance value  $Z = 44.6 + j0.5 \Omega$ ,  $|Z| = 44.6 \Omega$ , the reflection coefficient  $|\Gamma| = 0.06$ , return loss RL = 24.82 dB.

In manually calculation, on antenna impedance to determine the values of the reflection coefficient and its SWR value using equation (2), (3) and (4) as follows:

$$Z = 44,6 + j0,5 \Omega$$

$$|Z| = \sqrt{44,6^2 + 0,5^2} = \sqrt{1989,16 + 0,25} = \sqrt{1989,41} = 44,6028 \Omega$$

$$|\Gamma| = \frac{Z_1 - Z_0}{Z_1 + Z_0} = \frac{50 - 44,6028}{50 + 44,6028} = \frac{5,3972}{94,6028} = 0,05705117$$

$$SWR = \frac{1+|\Gamma|}{1-|\Gamma|} = \frac{1+0,05705117}{1-0,05705117} = \frac{1,05705117}{0,94294883}$$

$$= 1,12100587$$

$$RL = -20 \log |\Gamma| = -20 \log 0,05705117 = -20 \times -1,24375444$$

$$= 24,8747 \text{ dB}$$

Whenever compared to manual calculation, the difference is almost zero, so it can be verified that the results of field measurements and calculations are the same manual.

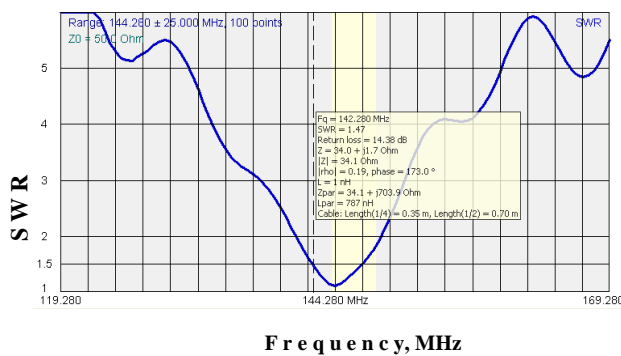


Fig. 11 The lower limit frequency of the antenna 2

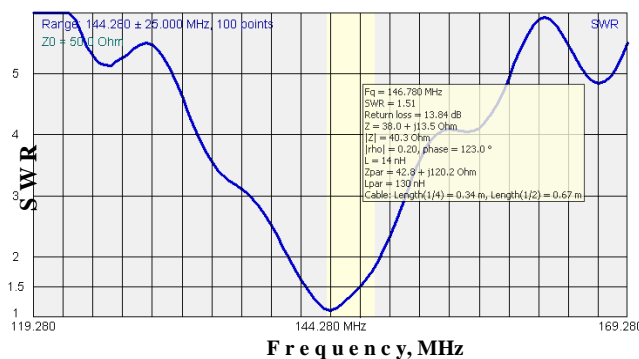


Fig. 12 The Upper limit frequency of the antenna 2

Figure 11 has shown the lower frequency limit of the 2 SLC antenna, which is the SWR value = 1: 1.47 shown at the frequency of 142,280 MHz, while Figure 12 shows the upper frequency of 146,780 MHz at the SWR value = 1: 1.51. From both these frequencies can be calculated frequency field width (BW) as the frequency response characteristics of the antenna 2 and also the value of the quality factor. Based on equation (5), it is obtained:

$$BW = 146,780 - 142,280 = 4,500 \text{ MHz}$$

By using equation (7) the value of the quality factor Q is calculated as follows:

$$Q = \frac{f_0}{BW} = \frac{144,280 \text{ MHz}}{4,500 \text{ MHz}} = 32,062$$

From the data and calculations above, it can be concluded that for the frequency characteristics with a center frequency of 144.280 MHz for antenna 1 (CLC) the field width is obtained BW = 5.166 MHz and the quality factor Q = 27.929 while for antenna 2 (SLC) the field width is obtained BW = 4.500 MHz and quality factor Q = 32.062. Thus it can be said that an antenna with a loading coil made of silver (SLC) has a higher quality factor or has a higher selectivity than an antenna with a copper loading coil (CLC)..

### 4.3 Measurement of Antenna Gain

For the measurement of the gain or ERP (Effective Radiated Power) antenna substantially carried out in the open that is in position latitude = 0750.66993 S, Longitude = 11021.76536 E, Altitude = 90 meters (backyard Rest Area Pyramid road Parangtritis Km 5.5 Yogyakarta) and with 4 Different measuring point stations. Each location measurements that Station A is located at a distance of 37 meters with Altitude = 90 meters (still in around Rest Area Pyramid), Station B at a distance of 23.953 km with Altitude = 592 meters (in Kaliurang), Station C at a distance of 9.507 km with Altitude = 36 meters (in the town of Bantul) and D stations with a distance of 11.055 km with Altitude = 100 meters (at Godean). The measurement results are shown in Table II as follows:

Table II  
PERFORMANCE MEASUREMENT RESULTS OF THE DRIVE TEST OF CLC AND SLC

No	Parameters	CLC Antenna 1	SLC Antenna 2	Impacts
1.	Results Antenna ERP (dBm)	-64.33	-45.35	SLC is bigger than ERP
2.	Results Antenna Gain (dBcollinear)	10.65	29.63	SLC has higher Gain
3.	Sta. A(PD=037km, Alt=90m) signal (dBm)	-68.93	-68.13	SLC greater its radiation emission power
4.	Sta. B(PD=023.953km, Alt=592m) signal (dBm)	-67.02	-45.38	SLC greater its radiation emission power
5.	Sta. C(PD=9.507km, Alt=36m) signal (dBm)	-92.45	-91.93	SLC greater its radiation emission power
6.	Sta. D(PD=11.055km, Alt=100m) signal (dBm)	-73.75	-74.73	SLC greater its radiation emission power

From the results of the ERP measurements above, the total value and gain value of each antenna can be calculated, so that it can show the difference in antenna quality with different loading coil materials. Values of

electromagnetic waves received by each antenna location for the measurement point 1 (SLC) as follows.

$$\text{Station A, } S_1 = \text{antilog } -68.93/10 = 1.279381304 \times 10^{-7} \text{ mW}$$

$$\text{Station B, } S_2 = \text{antilog } -67.02/10 = 1.986094917 \times 10^{-7} \text{ mW}$$

$$\text{Station C, } S_3 = \text{antilog } -92.45/10 = 5.688529308 \times 10^{-10} \text{ mW}$$

$$\text{Station D, } S_4 = \text{antilog } -73.75/10 = 4.216965034 \times 10^{-8} \text{ mW}$$

The total power received by the 4 point measurement locations in mW as follows:

$$\begin{aligned} \text{Total Power} &= (1.279381304 \times 10^{-7} + 1.986094917 \times 10^{-7} + \\ & 5.688529308 \times 10^{-10} + 4.216965034 \times 10^{-8}) \text{ mW} \\ &= (1.279,381304 + 1.986,094917 + \\ & 5.688529308 + 421,6965034) \times 10^{-10} \text{ mW} \\ &= 3,692861254 \times 10^{-7} \text{ mW} \end{aligned}$$

In the form of logarithms as follows:

$$10 \log 3,692861254 \times 10^{-7} = -64,32637 \text{ dBm}$$

The amount of ERP for antenna 1 (CLC) is -64.33 dBm. So that the gain antenna 1 (CLC) can be calculated  $-64.33 \text{ dBm} - (-74.98 \text{ dBm}) = 10.65 \text{ dBm}$ , where -74.98 dBm is the total losses in the system.

For Figure 12, the value of the received electromagnetic waves each measurement point location for the antenna 2 (SLC) as follows:

$$\text{Station A, } S_1 = \text{antilog } -61.93/10 = 1,53815464 \times 10^{-7} \text{ mW}$$

$$\text{Station B, } S_2 = \text{antilog } -45,38/10 = 2,897343588 \times 10^{-5} \text{ mW}$$

$$\text{Station C, } S_3 = \text{antilog } -91,93/10 = 6,412095766 \times 10^{-10} \text{ mW}$$

$$\text{Station D, } S_4 = \text{antilog } -74,73/10 = 3,365115694 \times 10^{-8} \text{ mW}$$

The total power received by the 4 point measurement locations in mW as follows:

$$\begin{aligned} \text{Power Total} &= (1,53815464 \times 10^{-7} + 2,897343588 \times 10^{-5} + \\ & 6,412095766 \times 10^{-10} + 336,5115694 \times 10^{-8}) \text{ mW} \\ &= (1.538,15464 + 289.734,3588 + \\ & 6,412095766 + 336,5115694) \times 10^{-10} \text{ mW} \\ &= 291.615,4371 \times 10^{-10} = 2,916154371 \times 10^{-5} \text{ mW} \end{aligned}$$

In the form of logarithms as follows:

$$10 \log 2,916154371 \times 10^{-5} = -45,3518949 \text{ dBm}$$

The amount of ERP for antenna 2 (SLC) is -45.35 dBm. So that the gain of antenna 2 can be calculated  $-45.35 \text{ dBm} - (-74.98 \text{ dBm}) = 29.63 \text{ dBm}$ .

Table III.

GAIN MEASUREMENT RESULTS

Measurement Location	CLC Antena 1 (dBm)	SLC Antena 2 (dBm)
Station A	-68,93	-68,13
Station B	-67,02	-45,38
Station C	-92,45	-91,93
Station D	-73,75	-74,73
Total ERP	-64,33	-45,35
Gain	10,65	29,63

Measurements in Table I, Table II and Table III shows the results in four stations, three of them acquire a greater value for the antenna model 2 (SLC) so that the overall amount of strong wave field electromagnetic received by the four stations in the location of the measurement value is greater for antenna 2 based on SLC. So that the antenna model 2 (SLC) has greater efficiency and gain than the antenna model 1 (CLC) because it can reduce attenuation and reduce resonance in the telex model antenna.

## V. CONCLUSION

From the measurement data, calculation and analysis of the above can be taken some conclusions as follows:

- The length of the feeder cable used in the antenna system must be tuned at the frequency used in order for resonance to occur, so that the impedance of the cable is resistive or the reactive component is minimized. In this study, the cable length according to  $1 / 2\lambda$  was 0.69m and the total cable length was 10.24 meters.
- Characteristics of 144.280 MHz center frequency for antenna model 1 (CLC) acquired bandwidth BW = 5.166 MHz and a quality factor Q = 27.929 while the second antenna models (SLC) was obtained bandwidth BW = 4.500 MHz and a quality factor Q = 32.062. Thus, an antenna with loading coils of silver material has a higher quality factor or having a higher selectivity compared to an antenna with loading coils of copper.
- The results of the field strength measurement at 4 measurement stations show that 3 of them obtained a greater value for antenna model 2 (SLC) so that the overall number of electromagnetic wave field strengths received by the four measurement locations is greater for antenna model 2 (SLC).

Antenna model 2 (SLC) also has a greater efficiency and gain of 29.63 dBm than the antenna model 1 (SLC) which only has a gain of 10.65 dBm because it can convert electrical energy into greater electromagnetic wave energy by reducing attenuation and reducing resonance on the antenna.

#### ACKNOWLEDGEMENT

I would like to express my gratitude to those who have helped carry out this research, including:

1. Yogyakarta National Institute of Technology which provided the opportunity and money to carry out this research
2. Yogyakarta City Local ORARI colleagues who have assisted in field measurements

#### REFERENCES

- [1] S. Kristiyana, "SISTEM DETEKTOR ARAH SINYAL RF MENGGUNAKAN ANTENA DOPPLER," *J. Teknol. TECHNOSCIENTIA*, pp. 192–201, 2015.
- [2] S. Sunarno, "Pengukuran Kekuatan dan Sudut Elevasi Pancaran Antena Omnidirectional," *Teknofisika*, vol. 1, no. 2, pp. 57–64.
- [3] M. A. Antoniadis and G. V. Eleftheriades, "A compact multiband monopole antenna with a defected ground plane," *IEEE Antennas Wirel. Propag. Lett.*, vol. 7, pp. 652–655, 2008.
- [4] M.-C. Huynh and W. Stutzman, "Ground plane effects on planar inverted-F antenna (PIFA) performance," *IEE Proceedings-Microwaves, Antennas Propag.*, vol. 150, no. 4, pp. 209–213, 2003.
- [5] Z. N. Chen, T. S. P. See, and X. Qing, "Small printed ultrawideband antenna with reduced ground plane effect," *IEEE Trans. Antennas Propag.*, vol. 55, no. 2, pp. 383–388, 2007.
- [6] J. Huang, "The finite ground plane effect on the microstrip antenna radiation patterns," *IEEE Trans. Antennas Propag.*, vol. 31, no. 4, pp. 649–653, 1983.
- [7] R. O. Manalu, "Perbandingan Model Empiris Propagasi Pathloss Guna Estimasi Rugi-Rugi Lintasan Antena Radar di Perum LPPNPI Indonesia." POLITEKNIK NEGERI SRIWIJAYA, 2017.
- [8] I. Jaya, C. M. OM, and A. Zainuddin, "DESAIN DAN IMPLEMENTASI ANTENA TELEX  $2 \times 5/8 \lambda$  UNTUK APLIKASI SISTEM PENYIARAN RADIO FM," *DIELEKTRIKA*, vol. 3, no. 1, pp. 34–44, 2018.
- [9] S. Setiawan and R. N. Zaini, "PENGEMBANGAN ANTENA TELEX HYGAIN 2 METER BAND MENJADI  $3 \times 5/8 \lambda$  DI FREKUENSI 144-147 MHz UNTUK KOMUNIKASI AMATIR MENGGUNAKAN SISTEM PEMBALIK PHASE," *J. Teknol. Dan Sist. Inf. Bisnis*, vol. 2, no. 2, pp. 132–140, 2020.
- [10] B. Maruddani, "METODE PREDIKSI DAN TEKNIK MITIGASI REDAMAN PROPAGASI HUJAN MENGGUNAKAN HIDDEN MARKOV MODEL PADA KANAL SATELIT PITA-K DI DAERAH TROPIS."
- [11] L. Mubarokah, "Karakteristik Redaman dan Shadowing dalam Ruang pada Kanal Radio 2, 4 GHz." Institut Teknologi Sepuluh Nopember, 2015.
- [12] W. Pamungkas, E. Wahyudi, and A. Wijaya, "Pengaruh Loading Coil Terhadap Redaman Kabel."
- [13] Y. A. Lestari, "Rancang Bangun Antena Yagi 2, 4 GHz untuk Memperkuat Penerimaan Sinyal 3G." Politeknik Negeri Sriwijaya, 2015.
- [14] E. Apriliana, "RANCANG BANGUN ANTENA YAGI UNTUK MEMPERKUAT PENERIMAAN SINYAL 4G." POLITEKNIK NEGERI SRIWIJAYA, 2016.
- [15] M. A. Rijalfaris, H. Wijanto, and Y. P. Saputera, "Antena Mikrostrip Persegi Panjang Celah Kembar Untuk Wifi Pita Ganda 2.4 Dan 5.8 Ghz," *eProceedings Eng.*, vol. 6, no. 2, 2019.
- [16] F. Yang and Y. Rahmat-Samii, "Reflection phase characterizations of the EBG ground plane for low profile wire antenna applications," *IEEE Trans. Antennas Propag.*, vol. 51, no. 10, pp. 2691–2703, 2003.
- [17] S. Se and M. Brady, "Ground plane estimation, error analysis and applications," *Rob. Auton. Syst.*, vol. 39, no. 2, pp. 59–71, 2002.
- [18] G.-T. Lei, R. W. Techentin, and B. K. Gilbert, "High-frequency characterization of power/ground-plane structures," *IEEE Trans. Microw. Theory Tech.*, vol. 47, no. 5, pp. 562–569, 1999.
- [19] S. Marini, A. H. Paronda, A. Hasad, S. Supratno, and T. Toufiqurohman, "Perancangan Antena Telex Frekuensi 142,000 Mhz Untuk Aplikasi Komunikasi Radio Antar Penduduk Indonesia," in *Prosiding-Seminar Nasional Teknik Elektro UIN Sunan Gunung Djati Bandung*, 2020, pp. 84–90.
- [20] R. Kartika, "Aplikasi Logika Fuzzy Pada Pengelompokan Nilai SWR Ideal Antena dengan Bahan Dasar Aluminium."
- [21] R. K. Pramuyanti, "Analisa Bahan dasar Pembuat Antena Untuk Memaksimalkan Daya Pancar dan Daya Terima," *ReTHI*, 2015.
- [22] R. K. Pramuyanti, "Nantena Aluminium Guna Optimasi Transmisi Gelombang Radio," *Kilat*, vol. 5, no. 2, pp. 136–141, 2016.
- [23] R. K. Pramuyanti, "ALUMINIUM BAHAN ANTENA UNTUK OPTIMASI TRANSMISI GELOMBANG RADIO," *Simetris J. Tek. Mesin, Elektro dan Ilmu Komput.*, vol. 7, no. 1, pp. 345–352, 2016.
- [24] I. Y. Wulandari, "SIMULASI PENINGKATAN BANDWIDTH PADA ANTENA MIKROSTRIP DENGAN TEKNIK DEFECTED GROUND STRUCTURE (DGS) MENGGUNAKAN SOFTWARE SONNET," *J. Ind. Elektro dan Penerbangan*, vol. 8, no. 1, 2020.
- [25] M. Al Adalah, "PERANCANGAN ANTENA MIKROSTRIP TRIANGULAR DENGAN SLOTTED GROUND PLANE UNTUK APLIKASI RADAR ALTIMETER," *eJournal Mhs. Akad. Telkom Jakarta*, vol. 2, no. 2, pp. 9–17, 2020.
- [26] T. D. Hakim and B. S. Bawono, "RANCANG BANGUN ANTENA VERTIKAL GROUND PLANE  $\frac{1}{4} \lambda$  PADA FREKUENSI 470 MHZ," *Elektrokrisna*, vol. 8, no. 2, 2020.
- [27] E. Endrayana, D. H. S. Wahyuni, N. Nachrowie, and I. Mujahidin, "Variasi Ground Plane Antena Collinear Pada Pemancar Televisi Analog Dengan Frekuensi Uhf 442 Mhz," *JASIEK (Jurnal Apl. Sains, Informasi, Elektron. dan Komputer)*, vol. 1, no. 2, pp. 149–156, 2019.
- [28] I. W. (STTNAS J. A., "Rancang Bangun Antena Groud Plane sebagai Transceiver pada Jalur 2m Frekuensi 144-146 MHz," Jogyakarta, 2008.
- [29] A. Marwanto, S. K. Syed Yusof, and M. H. Satria, "Orthogonal Frequency-Division Multiplexing-Based Cooperative Spectrum Sensing for Cognitive Radio Networks," *TELKOMNIKA (Telecommunication Comput. Electron. Control.)*, vol. 12, no. 1, p. 143, Mar. 2014.
- [30] H. W. Silver, "ARRL Handbook," *ARRL*, 2019. [Online]. Available: <https://hamsci.org/sites/default/files/resources/erp.pdf>. [Accessed: 22-Sep-2019].
- [31] M. Alaydrus, *Antena Prinsip dan Aplikasi*, 1st Editio. Yogyakarta.: Graha Ilmu, 2011.
- [32] Dennis Roddy & John Coolen, *Electronic Communication*, 2nd Editio. New Delhi: Prentice Hall of India Private Limited, New Delhi 110001, 1981.

## Lampiran 6. Keterangan Bebas Plagiasi



YAYASAN BADAN WAKAF SULTAN AGUNG  
UNIVERSITAS ISLAM SULTAN AGUNG  
**FAKULTAS TEKNOLOGI INDUSTRI**  
Jl. Raya Kaligawe Km. 4 PO BOX. 1054 Telp. (024) 6583584 Ext. 349 Semarang 50012

**FAKULTAS TEKNOLOGI INDUSTRI**

**MAGISTER TEKNIK ELEKTRO**

### KETERANGAN BEBAS PLAGIASI

Tim Pemeriksa Kemiripan Tulisan Ilmiah telah memeriksa unggahan file atas nama:

Nama : Suyanta  
Program Studi : Magister Teknik Elektro, Universitas Islam Sultan Agung,  
Semarang  
Judul Tesis : OPTIMALISASI GAIN ANTENA PADA ANTENA GROUND  
PLANE BERBASIS LOADING COIL PERAK  
Pemeriksa : Ketua Program Studi MTE UNISSULA  
Tanggal Periksa : 16 Juni 2021

Menyatakan bahwa hasil pemeriksaan dengan menggunakan aplikasi Turnitin terhadap tulisan ilmiah dengan judul diatas menghasilkan kemiripan sebesar 15 % dengan sumber – sumber online lainnya.

Demikian surat keterangan ini dibuat untuk dipergunakan sebagaimana mestinya.

Ketua Program Studi

Magister Teknik Elektro

Arif Marwanto, ST., M. Eng., Ph. D  
NIDN: 210600018/0628097501





YAYASAN BADAN WAKAF SULTAN AGUNG  
UNIVERSITAS ISLAM SULTAN AGUNG  
**FAKULTAS TEKNOLOGI INDUSTRI**  
Jl. Raya Kaligawe Km. 4 PO BOX. 1054 Telp. (024) 6583584 Ext. 349 Semarang 50012

**FAKULTAS TEKNOLOGI INDUSTRI**

**MAGISTER TENIK ELEKTRO**

ACC

Sesuai dengan ketentuan UNISSULA <24.99%

Ka Prodi MTE



Anief Marwanto, Ph.D

Turnitin Originality Report

[Document Views](#)

Processed on: 16 Jun 2021 9:17 AM +08  
File: 101740000  
Word Count: 8638  
Submitted: 1

OPTIMALISASI GAIN ANTENA PADA ANTENA GROUND P... By Suyanta  
Suyanta






Similarity Index	Identified by Source
16%	Internet Sources: 10% Publications: 5% Student Papers: 1%

Similarity Index	Identified by Source
4% match (Identified from 11 Nov-2020)	<a href="http://ru.unissula.ac.id">http://ru.unissula.ac.id</a>
2% match (Identified from 06 Feb-2021)	<a href="https://www.researchgate.net/publication/348544446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane">https://www.researchgate.net/publication/348544446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane</a>
1% match (Identified from 16 Nov-2020)	<a href="https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane">https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane</a>
1% match (Identified from 02 Feb-2021)	<a href="https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane">https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane</a>
1% match (Identified from 06 May-2020)	<a href="https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane">https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane</a>
1% match (Identified from 02 Aug-2020)	<a href="https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane">https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane</a>
1% match (Identified from 22 Oct-2019)	<a href="https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane">https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane</a>
1% match (Identified from 16 Jul-2018)	<a href="https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane">https://www.researchgate.net/publication/354444446/Optimalisasi_Gain_Antena_Pada_Antena_Ground_Plane</a>

## Lampiran 7. Log Book Bimbingan Tesis

### LOG BOOK : BIMBINGAN TESIS

Nama Mahasiswa : SUYANTA  
 NIM : 20601700035  
 Judul Tesis : OPTIMALISASI GAIN ANTENA PADA ANTENA GROUNDPLANE  
 BERBASIS LOADING COIL PERAK  
 Pembimbing 1 : Arief Marwanto, ST, MEng, Ph.D  
 Pembimbing 2 :

No.	TANGGAL	CATATAN / URAIAN KEGIATAN	PARAF DOSEN
1	7/12/2020	Konsultasi tata tulis penulisan tesis Revisi judul, Pendahuluan, Model Sistem, Bab II, bab III	
2	27/1-2021	Penulisan keterangan gambar, tabel. Penulisan sitasi dan daftar referensi Bab 4	
3	24/4- 2021	Memantapkan seminar hasil, Bab I- bab 5	
4	1/5-2021	Revisi judul lagi. Keaslian penelitian diperbaiki, Menambal referensi Tujuan dan manfaat. Analisis diperbaiki	
5	15/5-2021	Perbaikan tujuan dengan kesimpulan	

## LOG BOOK : BIMBINGAN TESIS






Nama Mahasiswa : SUYANTA

NIM : 20601700035

Judul Tesis : OPTIMALISASI GAIN ANTENA PADA ANTENA GROUNDPLANE  
BERBASIS LOADING COIL PERAK

Pembimbing 1 : Arief Marwanto, ST, M.Eng, Ph.D

Pembimbing 2 :

No.	TANGGAL	CATATAN / URAIAN KEGIATAN	PARAF DOSEN
6	28/5 2021	Metode pengukuran diperbaiki. Konsultasi perbaikan tesis dari Para penguji BAB I-V	
7	29/5 2021	Acc majin sidang tesis Melengkapi daftar isi, lampiran dll	
8	3/6-2021	Mencoretkan bagian penelitian dg kesimpulan. Revisi grafik lebar panjang kabel dg susuk	
9	9/6-2021	.Konsultasi pasca sidang tesis. Memperbaiki semua saran penguji dan pembimbing. Acc dicetak/jilid	
		ACC 	

## LOG BOOK : BIMBINGAN TESIS






Nama Mahasiswa : SUYANTA

NIM : 20601700035

Judul Tesis : OPTIMALISASI GAIN ANTENA PADA ANTENA GROUNDPLANE  
BERBASIS LOADING COIL PERAK

Pembimbing 1 :

Pembimbing 2 : Ir. Suryani Atifah, M.T., Ph.D.

No.	TANGGAL	CATATAN / URAIAN KEGIATAN	PARAF DOSEN
	2/12 2020	- konsultasi bab I-II - Tujuan dan manfaat penelitian - tata tulis tesis	
	27/1 2021	- konsultasi bab I-III - ketepatan gambar dan tabel. - Metode pengaliran / pengamatan diperbaiki	
	8/2 2021	- Menambahkan teori tentang bahan - Revisi bab IV dan bab V	
	24/4 2021	- konsultasi Bab I-V lengkap - Aca seminar hasil	
	1/5 2021	- Revisi judul. - grafik hubungan antara panjang kabel Versus SWR - Menambahkan analisis bahan perak lebih bagus	

## LOG BOOK : BIMBINGAN TESIS




Nama Mahasiswa : SUYANTA

NIM : 20601700035

Judul Tesis : OPTIMALISASI GAIN ANTENA PADA ANTENA GROUNDPLANE  
BERBASIS LOADING COIL PERAK

Pembimbing 1 :

Pembimbing 2 : Ir. Suryani Alifah, MT, Ph.D.

No.	TANGGAL	CATATAN / URAIAN KEGIATAN	PARAF DOSEN
	28/5 2021	- Konsultasi pasca seminar hasil - merevisi memperbaiki tesis sesuai saran 3 penguji	
	29/5 2021	- Menambatkan teori dan memperbaiki flowchart langkah penelitian. - ACC maju sidang tesis	
	3/6-2021	- Memperbaiki grafik di bab IV, melengkapi daftar isi lampiran dll	
	9/6-2021	- Konsultasi pasca sidang, memper- baiki semua saran dosen penguji dan pembimbing. - ACC di antara jilid	